

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 12/35



Compact

Guide handle without tool folding - fits in any car boot



Plug and Play retrofit kits

Assembly in no time at all - machine can be individually customised




All-round protection

Machine equipped with protective bar as standard

Shipping dimensions in m3

BP 12/35

0,134

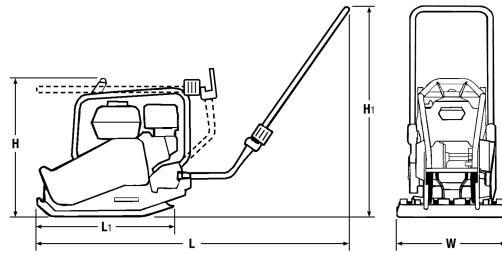

Standard Equipment

- Vibration insulated steering handle, foldable
- Detachable steering handle
- Hand-arm vibrations <5m/s²
- Automatic shutdown at low oil level
- Engine protection frame
- Highly wear resistant base plate
- Recoil starter
- Fully protected V-belt
- Carrying handles
- Single point lifting device
- 3-2-1 Warranty

Optional Equipment

- Sprinkler system (10l)
- Sprinkler system (7l)
- Spraying system, base plate (350mm)
- Transport wheels
- Vulcolan mat
- Hour meter
- Special painting
- Service Kit
- Tool kit

Dimensions in mm

	H	H1	L	L1	W
BP 12/35	554	854	1280	532	350

Technical Data

**BOMAG
BP 12/35**

Weights

Operating weight CECE	kg	67
Basic weight	kg	67

Dimensions

Working width	mm	350
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	25
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda
Engine type	GX 120
Emission stage	Stage V / CARB P.3
Cooling	air
Number of cylinders	1
Performance SAE J 1349	kW 2,6
Speed	min-1 3.600
Drive system	mech.
Fuel	Gasoline
Fuel consump. aver. during operation	l/h 0,9

Exciter system

Frequency	Hz	92
Centrifugal force	kN	12
Amplitude	mm	1,75

Capacities

Fuel	l	2,0
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 834 68 010

120325 Sa

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

