

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 25/50 D



Compact

Guide handle without tool folding - fits in any car boot



Plug and Play retrofit kits

Assembly in no time at all - machine can be individually customised




All-round protection

Machine equipped with protective bar as standard

Shipping dimensions in m3

BP 25/50 D

0,235

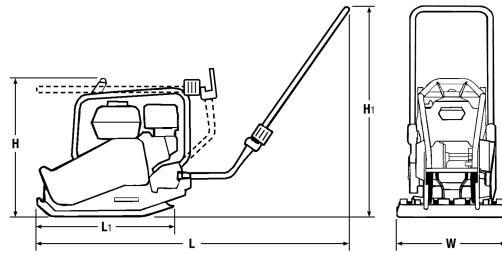

Standard Equipment

- Vibration insulated steering handle, foldable
- Detachable steering handle
- Hand-arm vibrations <5m/s²
- Automatic decompression
- Engine protection frame
- Highly wear resistant base plate
- Recoil starter
- Fully protected V-belt
- Carrying handles
- Single point lifting device
- 3-2-1 Warranty

Optional Equipment

- Sprinkler system (10l)
- Sprinkler system (7l)
- Spraying system, base plate (500mm)
- Transport wheels
- Vulcolan mat
- Special painting
- Service Kit
- Tool kit

Dimensions in mm

	H	H1	L	L1	W
BP 25/50 D	636	862	1287	558	500

Technical Data

**BOMAG
BP 25/50 D**

Weights

Operating weight CECE	kg	125
Basic weight	kg	125

Dimensions

Working width	mm	500
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	25
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer		Hatz
Engine type		1B20
Emission stage		Stage V
Cooling		air
Number of cylinders		1
Performance SAE J 1349	kW	
Performance ISO 3046	kW	3,1
Speed	min-1	3.000
Drive system		mech.
Fuel		Diesel
Fuel comsump. aver. during operation	l/h	0,7

Exciter system

Frequency	Hz	90
Centrifugal force	kN	25
Amplitude	mm	2,15

Capacities

Fuel	l	3,0
------------	---	-----

Technical modifications reserved. Machines may be shown with options.



PRE 834 74 010

120325 Sa

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

