

P2200i



FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box



Osiągi

Częstotliwość	Hz	50
Napięcie	V	230
Liczba faz		1
Moc maksymalna	watt	2100
Moc ciągła	watt	1900



Silnika


Producent silnika	Pramac	
Typ	OHV	
Zoptymalizowana emisja spalin	Stage V	
Obroty znamionowe	obr/min	Variable
Paliwo	Benzyna	
System rozruchu	Ręczny	
Pojemność układu smarowania	l	0.35
Czujnik braku oleju	✓	

Alternatora

Regulacja napięcia	Inverter
--------------------	----------

Dane wymiarowe

Długość	(L) mm	505
Szerokość	(W) mm	270
Wysokość	(H) mm	460
Waga (suchy)	kg	21
Wymiary kartonu DxSxW	mm	583x323x498

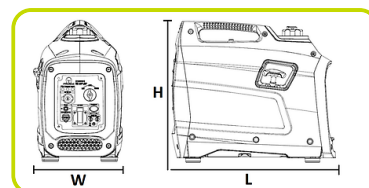

Czas pracy

Pojemność zbiornika paliwa		4.5
Zużycie paliwa @ 75%	l/h	1
Czas pracy przy 75%	h	4.5



Poziom hałasu

Gwarantowany poziom hałasu (LWA)	dBA	94
Poziom ciśnienia akustycznego z 7 m	dBA	66

GENSET CONTROL

COMMANDS

- Selector switch: O/I
- Air choke Valve
- Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

INSTRUMENTATION:

- Outputting energy (indicator light - Green)
- Overloading and Oil alarming (indicators light - Red)
- Parallel kit receptacles

PROTECTIONS

- Overload
- Oil Guard

OUTPUT:

- DC 12V 8A
- n°2 USB DC 5V 2A



GNIAZDA

SCHUKO 230V 16A IP44	1
----------------------	---

ACCESSORIES CONTROL PANEL

PARALLEL KIT

The Pramac Parallel Kit allows you to double your power when pairing two inverter generators together with the same output*.

By connecting two Inverter to one Parallel kit, customers can meet higher output requirements, powering multiple appliances at the same time for a total output of up to two times the rated power output of each individual Inverter.

TECHNICAL DATA

Nominal Tension: 230 V

Frequency: 50 Hz

Phases: 1

Rated Current: 30 A

IP protection: 30

CONTROL PANEL

1 x Schuko 16A (IP44)

1 x CEE 32A (IP44)

CABLES LENGTH: 450 mm

*Important: Applies when pairing two inverter generators with the same output.
Parallel kit sold separately.

DIMENSIONS PANEL

Szerokość	(W) mm	250
Wysokość	(H) mm	217
Głębokość	(D) mm	160
Waga	kg	1.5

